
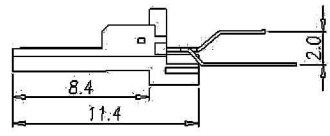





1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H



A
B
C
D
E
F
G
H





HOUSING + PIN

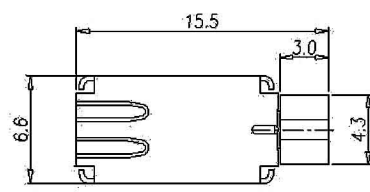


FRONT SHELL

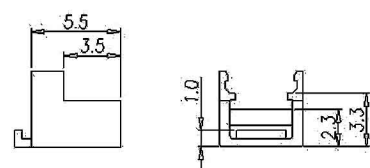

BACK COVER

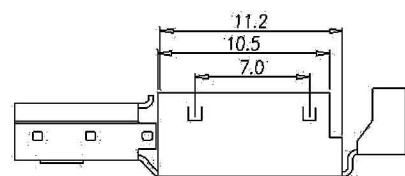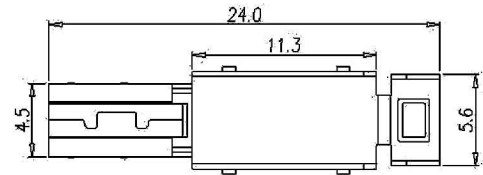

BACK SHFLL



1. MATERIAL :
 - 1-1. HOUSING : NYLON 6T
COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. FRONT SHELL : BRASS
 - 1-4. BACK SHELL : BRASS
 - 1-5. BACK COVER : NYLON 6T
2. FINISH :
 - 2-1. CONTACT A : SEE TABLE A
SOLDER AREA : BRIGHT TIN 80u"
 - 2-2. SHELL A : SEE TABLE A
UNDER PLATE : NICKEL
 - 2-3. SHELL B : SEE TABLE A
3. Safety :
 - 3-1. Rating:AC 5V/1A
 - 3-2. Insulation Resistance:
100M ohm Min at DC 500V
 - 3-3. Dielectric Withstanding Voltage:
AC 100V for 1 minute
 - 3-4. Contact Resistance :
50m ohm or less

NICKEL 50u"	GOLD 15u"
SHELL PLATING	CONTACT PLATING

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 DATE 制表日 2012/08/13	SCALE 比例 UNIT 單位 PAGE 張數 Hedy M M 1 / 1
PART NAME 品名 MINI B PLUG 4P SOLDER TYPE NICKEL SHELL SELECTIVE GOLD BLACK INSULATOR ROHS		PART NO. 料號 C8325-04BMSSB0R

1 2 3 4 5 6 7 8