

# **USB** Series

### KLS1-184 USB-BM SOLDER TYPE

#### **Material:**

Housing: 30% Glass filled PBT UL94V-0 Contacts: Phosphor Bronze Pin Plated: Gold 3u" over 50u" nickel


## **Electrical Characteristics:**


Current Rating: 1 AMP

Insulator Resistance: 1000M Ohm min. at 500 VDC Dielectric Withstanding Voltage:500 VAC / Minute

Contact Resistance: 30m Ohm max. Temperature: -55°C ~+105°C



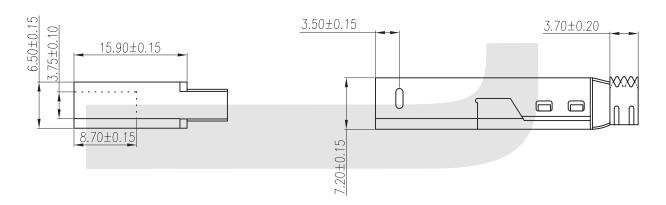

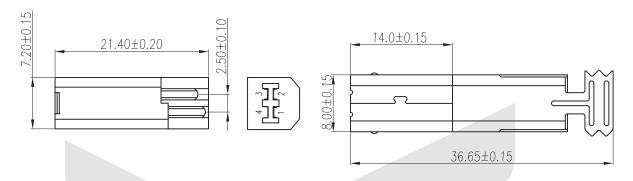

# ORDER INFORMATION

