


Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

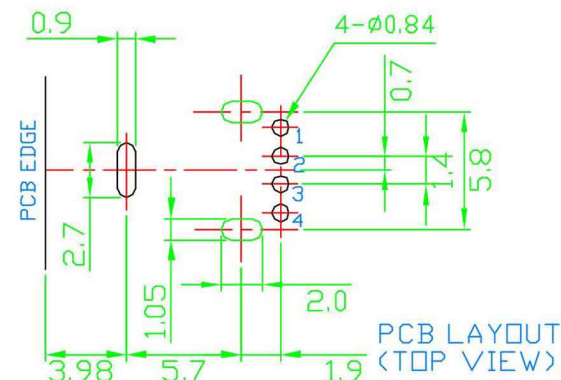

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u", NI:40~60u", TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty DWG. 製圖 Yumi DATE 制表日 2011/11/15	TOLERANCE 容許公差 X .x ±0.38 .XX ±0.25 .XXX ±0.13 .XXX ±0.05 SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	PART NAME 品名 USB A TYPE DIP TYPE SHORT BODY 4P FEMALE RIGHT ANGLE VERTICAL TYPE NICKEL SHELL SELECTIVE GOLD PLATING BLACK COLOR ROHS	PART NO. 料號 C8323-04AFVSB0R